



SEP0503E SERIES

New Products



RoHS Compliant

High Current SMD Power Inductors

PART NUMBERING SYSTEM


<u>SEP</u>	<u>0503E</u>	—	<u>1R0M</u>	—	<u>LF</u>
TYPE	DIMENSIONS		INDUCTANCE		LEAD FREE

FEATURES :

- Low profile (3.0mm max. height) and 5.75 mm max. square.
- Magnetically shielded and low DC resistance and Suitable for large current .
- Ideal for DC – DC converter inductor application in hand help personal Computer ,etc .
- Frequency range up to 5MHZ .
- Large current handling capability .

SHAPES AND DIMENSIONS :


UNIT : mm

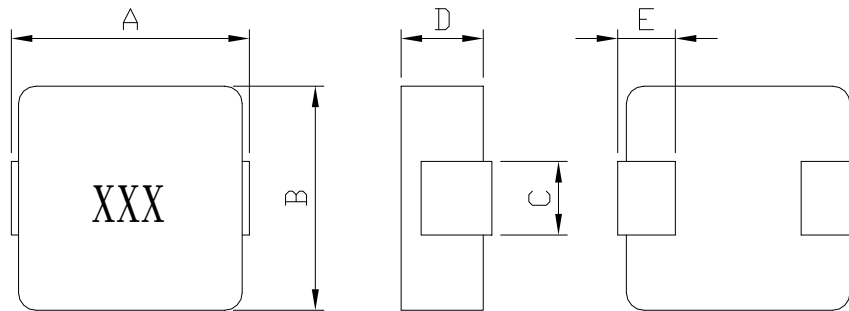

A=5.75 Max. B=5.45 Max. C=2.5±0.3 D=3.0 Max. E=1.0±0.3

RECOMMENDED PATTERNS

UNIT : mm

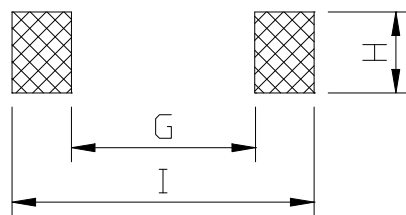

H=2.8 G= 2.2 I = 6.0



SEP0503E SERIES

New Products



High Current SMD Power Inductors

SPECIFICATION TABLE

RoHS Compliant

PART NUMBER	INDUCTANCE (μ H)	Isat (A) (Typ.)	Irms (A) (Typ.)	DCR (m Ω) (Max.)	TEST FREQ. (f)
SEP0503E-R15M-LF	0.15 \pm 20%	14.5	14.6	3.4	100KHz/0.1V
SEP0503E-R22M-LF	0.22 \pm 20%	11.3	13.3	4.4	100KHz/0.1V
SEP0503E-R33M-LF	0.33 \pm 20%	9.60	12.6	5.6	100KHz/0.1V
SEP0503E-R47M-LF	0.47 \pm 20%	8.20	11.4	6.5	100KHz/0.1V
SEP0503E-1R0M-LF	1.0 \pm 20%	7.50	8.80	13.1	100KHz/0.1V
SEP0503E-1R5M-LF	1.5 \pm 20%	6.30	6.75	18.5	100KHz/0.1V
SEP0503E-1R8M-LF	1.8 \pm 20%	6.00	6.50	21.8	100KHz/0.1V
SEP0503E-2R2M-LF	2.2 \pm 20%	5.60	6.30	24.0	100KHz/0.1V
SEP0503E-3R3M-LF	3.3 \pm 20%	4.90	4.85	38.5	100KHz/0.1V
SEP0503E-4R7M-LF	4.7 \pm 20%	4.40	4.00	63.2	100KHz/0.1V
SEP0503E-6R8M-LF	6.8 \pm 20%	2.60	3.20	103.3	100KHz/0.1V
SEP0503E-8R2M-LF	8.2 \pm 20%	2.30	3.10	112.7	100KHz/0.1V
SEP0503E-100M-LF	10 \pm 20%	2.10	2.89	122.0	100KHz/0.1V

- I sat : DC current at which the inductance drops 20% (typ) from its value without current.
- I rms : Average current for a 40°C temperature rise above 25°C ambient.
- Operating temperature range -55°C to +120°C , Electrical specifications at 25°C.