



MM1210M SERIES ~

Multilayer Ferrite Chip Common Mode Choke



RoHS Compliant


PART NUMBERING SYSTEM

<u>MM</u>	<u>1 2 1 0 M</u>	—	<u>9 0 0</u>	—	<u>LF</u>
TYPE	DIMENSIONS		IMPEDANCE		LEAD FREE

SHAPES AND DIMENSIONS

UNIT : mm


TOP VIEW

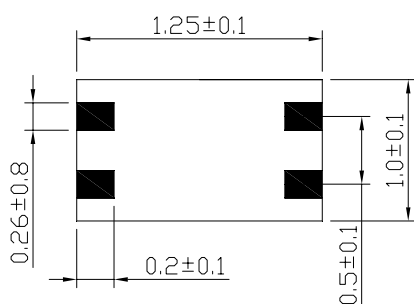

FRONT VIEW



PCB PATTERN



FEATURES

- The MM1210M series is effective for common mode noise suppression in digital equipment which causes Radiation from cables .
- Suitable for differential signal line like IEEE1394 , USB2.0 and LDVs .
- Low profile and low leakage flux due to monolithic structure enables high-density mounting .
- The nickelbarrier structure of the external electrodes provides excellent solder heat resistance .

APPLICATION

- Prevention of common mode noise on signal line in personal computers, computer built in equipment , Facsimiles , digital telephones , etc.



MM1210M SERIES ~

Multilayer Ferrite Chip Common Mode Choke



RoHS Compliant

PART NUMBER	IMPEDANCE @100MHz (Ω)	DCR (Ω) (Max.)	Rated Current Max. (mA)	Rated Voltage (V)	Insulation Resistance (mΩ) (Min.)
MM1210M-900-LF	90±25%	0.70	300	10	200
MM1210M-121-LF	120±25%	0.70	300	10	200

- Operating temperature range -40°C to +85°C
- Electrical specifications at 25°C.
- Packing : 7" reel, machine-ready ,embossed plastic tape (4,000 parts per full reel).

IMPEDANCE ANALYZER (IMPEDANCE VS FREQUENCY)

